

Figure 1

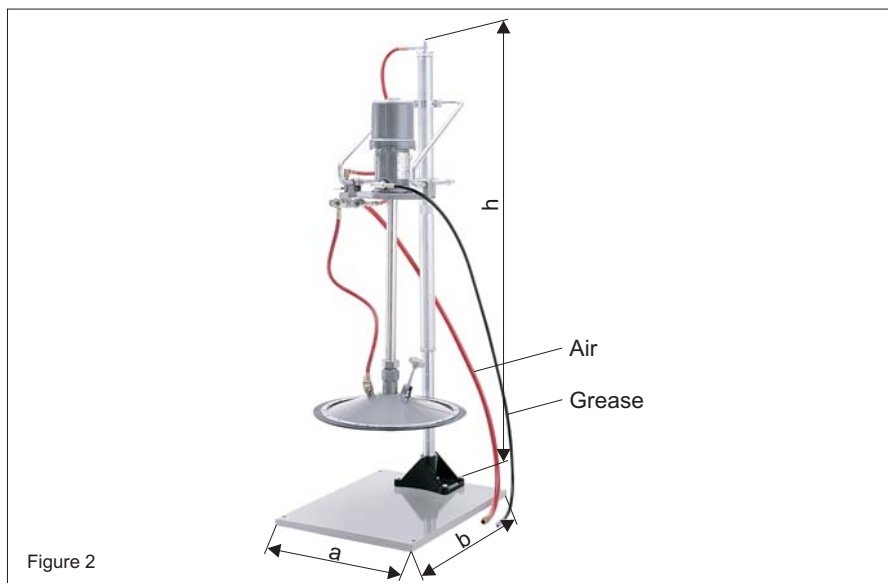


Figure 2

**Pneumatic drum pump**

**Technical data:**

Drive: pneumatic  
 Actuating pressure: 3 ... 10 bar  
 Transmission ratio: 50:1  
 Delivery volume  
 Type A: 0,8 l/min \*  
 Type B: 2,0 l/min \*  
 Delivery pressure: at max. 500 bar \*  
 Max. lifting frequency  
 Type A: 76/min \*  
 Type B: 100/min \*  
 Continuous operation: 70/min  
 Delivery medium: Oil and grease up to consistency class 2  
 Useable for 50/60 l and 200 l lid drums DIN 6644-4  
 Material: Stainless steel, aluminium and chrome

\* The values stated are maximum values that cannot be reached in combination!

Type	Drum [l]	Lifting device	Air inlet	Grease outlet	a [mm]	b [mm]	h [mm]	D [mm]	Fig.	Weight appr. [kg]	Purchase-number
A	200	without	3/8"NPT(i)	1/4"NPT(i)			1153	600	1	24	935.121-69
A	200	with	1/2"NPT(a)	3/8"NPT(a)	762	610	1400-2300		2	55	935.122-86
B	200	without	1/2"NPT(i)	3/8"NPT(i)			1245	600	1	29	935.121-71
B	200	with	1/2"NPT(a)	3/8"NPT(a)	762	610	1400-2300		2	61	935.121-72
A	50/60	without	3/8"NPT(i)	1/4"NPT(i)			965	384	1	18	935.121-70
A	50/60	with	3/8"NPT(a)	1/4"NPT(a)	375	496	1085-1828		2	23	935.122-95
B	50/60	without	1/2"NPT(i)	3/8"NPT(i)			1048	384	1	18	935.121-73
B	50/60	with	1/2"NPT(i)	3/8"NPT(i)	762	610	1400-2300		2	61	935.121-74

- Subject to modifications -